

## SYNTHETIC COMPRESSOR OIL FOR SCREW TYPE COMPRESSORS

**XL-7336** has been carefully formulated with ashless additive packages specifically designed to keep screw type compressors clean and lubricated.

**XL-7336** is recommended for both stationary and mobile compressors where by-products of combustion need to be kept in solution.


### **XL-7336 series of compressor fluids:**

- Cleans and restores metal surfaces by removing varnish and sludge deposits.
- Reduces or eliminates foaming (ASTM D-892 modified).
- Offers rapid separation of water from oil (ASTM D-1401 modified).

Oil filters are strongly recommended to ensure the integrity of **XL-7336** and extend fluid life in service.



Competition      **XL-7336**  
**Foam @ 80°C**

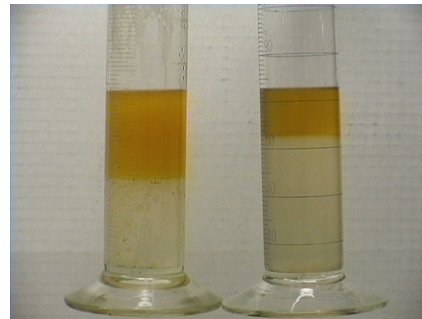

Competition      **XL-7336**  
**Demulsification**

TYPICAL SPECIFICATIONS				
Product Code: XL-7336	/022	/032	/046	/068
ISO Grade	22	32	46	68
Viscosity (cst @ 40°C) (ASTM D-445)	23.5	32.5	45.9	66.5
(cst @ 100°C) (ASTM D-445)	5.2	6.5	8.42	11.0
Viscosity Index (ASTM D-2270)	161	159	161	157
Flash Point (°C)	245	256	258	258
Pour Point (°C) (ASTM D-97)	-58	-47	-45	-40
Density (g/ml)	0.98	0.99	0.99	0.99
Colour	Amber			



255 avenue Labrosse, Pointe-Claire, Quebec, Canada H9R 1A3  
Tel: 514-694-5823 | 800-567-5823 | Fax: 514-694-8628 | www.thermal-lube.com

The information presented in this bulletin is, to the best of our knowledge, accurate. It is intended to be helpful, and is not to be considered a guarantee.

